



***Exactly What You Need™***

Choice of 16-, 18-  
or 20-hp Gas Recoil  
or Electric Start Engines

36-, 48-  
and 54-inch  
side discharge  
fixed decks

Heavy-gauge frame  
for durability

Space-saving fold-up  
discharge chute

Maintenance-free spindles  
and wheel bearings

**Maximum control with minimal fatigue provides true zero-turn capabilities. Best performer in all turf conditions.**

## **HYDRO WALK-BEHIND MOWER**

The closer you look at our rugged hydrostatic drive mower line, the more you'll realize it's the ultimate in value, control and productivity.

The instant forward/reverse capabilities eliminate the need to shift or pull backwards resulting in true zero-turn capability.

- **Easy-to-use SoftGrip™ fingertip controls require minimal pressure to hold.**
- **Long-life belts and blades with fewer service points**
- **Extreme Discharge System for superior clipping dispersal.**
- **Z-Control reduces operator fatigue and is so easy to use; built in OPC**
- **Dual hydraulic pumps and wheel motors for ultimate control and productivity.**
- **Cuts up to 20 acres in an 8 hour shift (54-inch deck).**

**www.bobcatturf.com • 1-866-469-1242**

# BOB-CAT® Hydrostatic Walk-Behind

## POWER OPTIONS

### 16HP\* KAWASAKI® FS Series

Engine.....	16HP* (11.9 kW) Kawasaki® V-Twin, Air-Cooled, Gas
Ignition.....	Electronic with Recoil Start
Fuel Capacity.....	5 gal. (18.9 l)
Lubrication.....	Pressure with Filter
Air Cleaner.....	Ducted Dual Element

### 18-HP\* KAWASAKI® FS Series

Engine.....	18-HP* (13.4 kW) Kawasaki® V-Twin, Air-Cooled, Gas
Ignition.....	Electronic or Electric Start
Fuel Capacity.....	5 gal. (18.9 l)
Lubrication.....	Pressure with Filter
Air Cleaner.....	Ducted Dual Element

### 20-HP\* KAWASAKI® FS Series

Engine.....	20-HP* (14.9 kW) Kawasaki® V-Twin, Air-Cooled, Gas
Ignition.....	Electronic or Electric Start
Fuel Capacity.....	5 gal. (18.9 l)
Lubrication.....	Pressure with Filter
Air Cleaner.....	Ducted Dual Element

## DRIVETRAIN

Transmission.....	Hydrostatic Drive with Dual Pumps and Wheel Motors;
Axle.....	1 (25 mm) Diameter
Drive.....	Belt from Engine to Hydro Input Shafts; Hydrostatic Drive to Wheels
Hydraulic Capacity.....	1.2 gal. (4.6 l) with 25-Micron Filtration
Brakes.....	Hydrostatic Provides Dynamic Braking; Dual-Wheel Parking Brake

## TIRES

All Models.....	Rear: (2) 16 x 7.50-8 4-Ply Turf Tread Tubeless;
Fixed Deck Front:.....	(2) 9 x 3.50-4 4-Ply Smooth Tread with Tube
Antiscalping.....	Smooth-Tread Pneumatic Caster Wheels;
Steering.....	Fingertip Levers at Handles Control Independent Power to Each Wheel for Moving, Stopping and Power Turning
Controls.....	Throttle; Speed Selector, Instant On-The-Go Tracking Knob; Wheel Drive Traction Levers with Locks; Blade Drive Switch; Dual-Wheel Parking Brake; Operator-Presence Controls; Keyed On/Off switch (On/Off/Start Switch on Electric Start Models)
Speed (maximum).....	6 mph (9.6 km/h) Forward; 2 mph (3.2 km/h) Reverse
Turning Radius.....	True Zero

## DIMENSIONS

### Overall Length

With 36" Deck.....	77.2" (1.93 m)
With 48" Deck.....	77.4" (1.96 m)
With 54" Deck.....	77.9" (1.97 m)

### Width

Width with 36" Deck.....	47" (1.19 m)
Width with 48" Deck.....	59" (1.85 m)
Width with 54" Deck.....	65" (1.89 m)

### Transport Width (chute up)

54" Deck Model.....	54" (137 cm)
48" Deck Model.....	48" (122 cm)
36" Deck Model.....	36.5" (93 cm)

### DuraDeck™ Weight

54" Deck Model.....	593 lbs. (269 kg) Fixed
48" Deck Model.....	582 lbs. (264 kg) Fixed
36" Deck Model.....	528 lbs. (239 kg) Fixed


Height.....	40.3" (1.02 m)
-------------	----------------

## ACCESSORIES

Jumbo Grass Catcher; Mulcherizer™ Mulching Kit; Fabric Catcher; Eco Plate Kit – Mulcher, Adapter for 36"– 54" decks; 36", 48", 54" Mulch Baffle Kit with Eliminator Blades; ACC – Hydro Cold Start; Kit – Baffle 48", 54", 52/54", 36", 48" and 54" Weight Kits

Specifications while correct at the time of printing may change without notice.  
BOB-CAT® is registered trademark of Schiller Grounds Care, Inc.  
© 2009 Schiller Grounds Care, Inc. All Rights Reserved.  
One BOB-CAT Lane, Johnson Creek, WI 53038  
www.bobcatturf.com • 920-699-2000

\*The power ratings are provided by the engine manufacturer. Actual power output is dependent on many factors including engine rpm, air density, and engine condition. For further information on engine horsepower, please contact Schiller Grounds Care customer service at 877-596-6337.

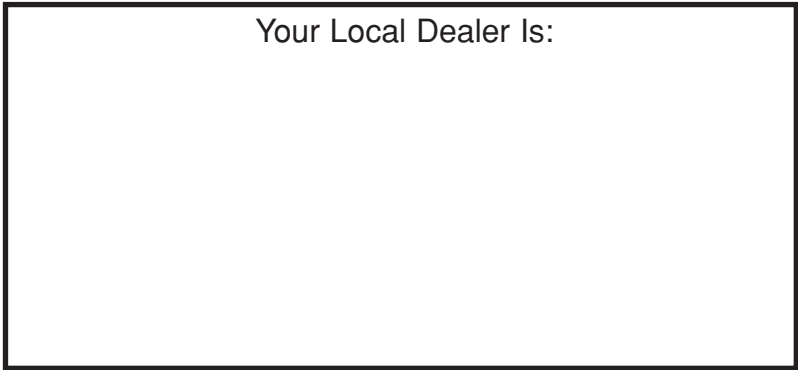

Your Local Dealer Is: